



UK Extension Socket


Unmatched Safety, Effortless Control




UL94-V0
Fire Rating



Child-proof



100% Copper Core
1.25mm² Wire Diameter



Large Space Between
Socket Holes



Independent
Switch Control



Maximum
Power 3250W



Overload
Protection



Resistant
To Plug

Product Features

5-Layer Safety Shield

V0 Bidirectional Flame-Retardant

Self-extinguishes at 750°C, with inner/outer layers for fire prevention.




Child-Safe Shutters

50N force required (CE-certified), blocks accidental access.



1.25mm² Pure Copper Core

Stable performance under high current, lower energy loss.

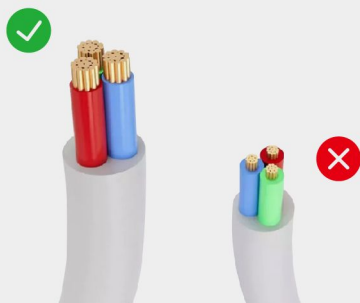


Isolated Safety Button

Auto power-off when rated power is exceeded, one-click reset. Physically separates circuits, minimizing risks.




Integrated Copper Conductors

Zero overheating even at full load.

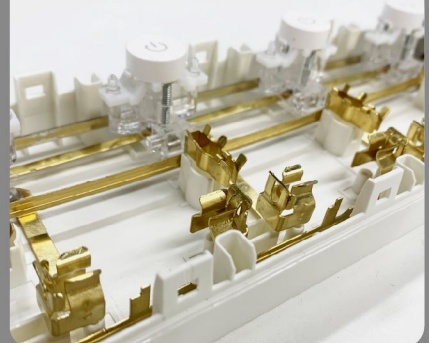

Glow-in-the-Dark Switches

Fluorescent markers on each switch ensure easy operation in low-light conditions.

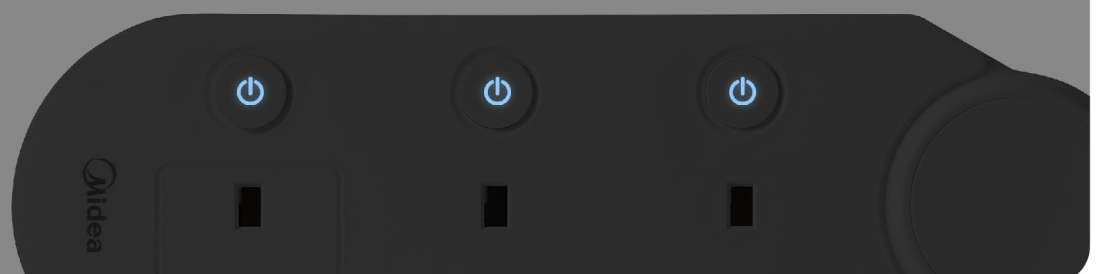



Model	ESB3K3B-B1	ESB4K4B-B1	ESB5K5B-B1
Socket Type	British	British	British
Plug Type	British	British	British
Rated Voltage	250V	250V	250V
Rated Current	13A	13A	13A
Length	2M/ 5M	2M/ 5M	2M/ 5M
Number of Sockets	3	4	5
Switch Type	Sub-control (3)	Sub-control (4)	Sub-control (5)
USB-A/ USB-C	/	/	/



Model	ESB4K3BUC-B1	ESB5K4BUC-B1
Socket Type	British	British
Plug Type	British	British
Rated Voltage	250V	250V
Rated Current	13A	13A
Length	2M/ 5M	2M/ 5M
Number of Sockets	3	4
Switch Type	Sub-control (4)	Sub-control (5)
USB-A/ USB-C	Yes	Yes